Høwkeye

Hawkeye Team B9: Vedant Parekh, Alvin Shek, Siddesh Nageswaran


Product Pitch

Autonomous drone videography offers limitless possibilities to capture cinematic shots for vlogging or provide critical monitoring data in high stakes rescue missions enabling users to focus on the more important tasks at hand.

For good videography of user it is important for a drone to have good stability and tracking. We were able to achieve 90+% in both stability and tracking (in simulation).




System Architecture

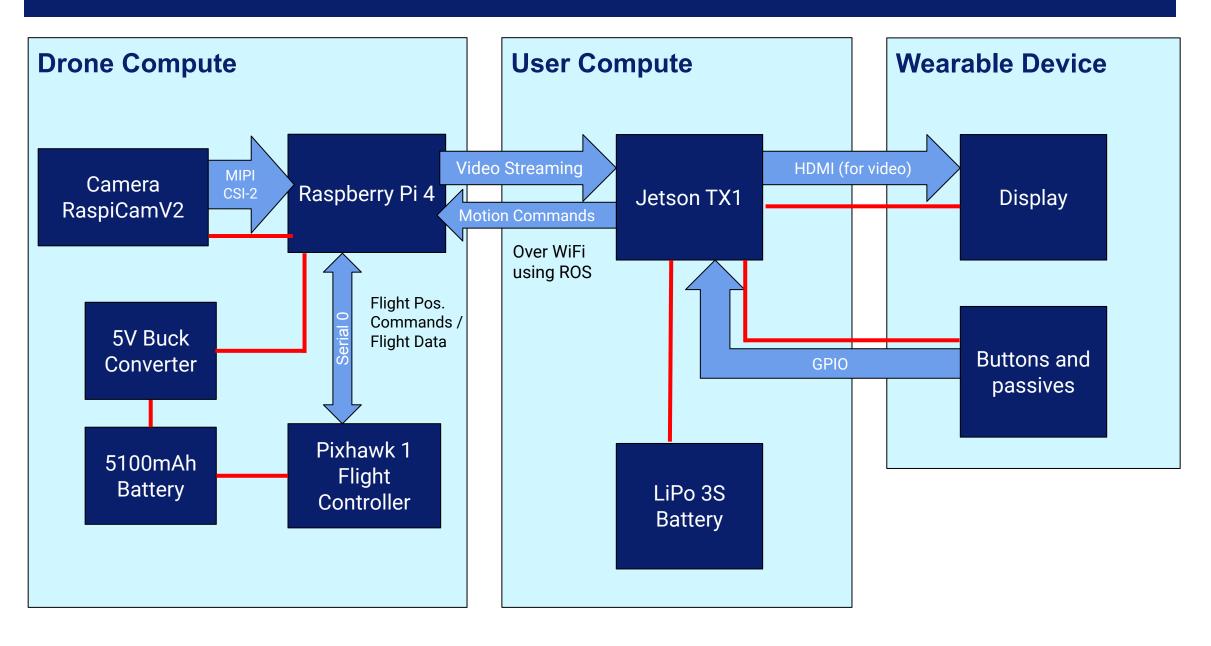



Team B9

System Description

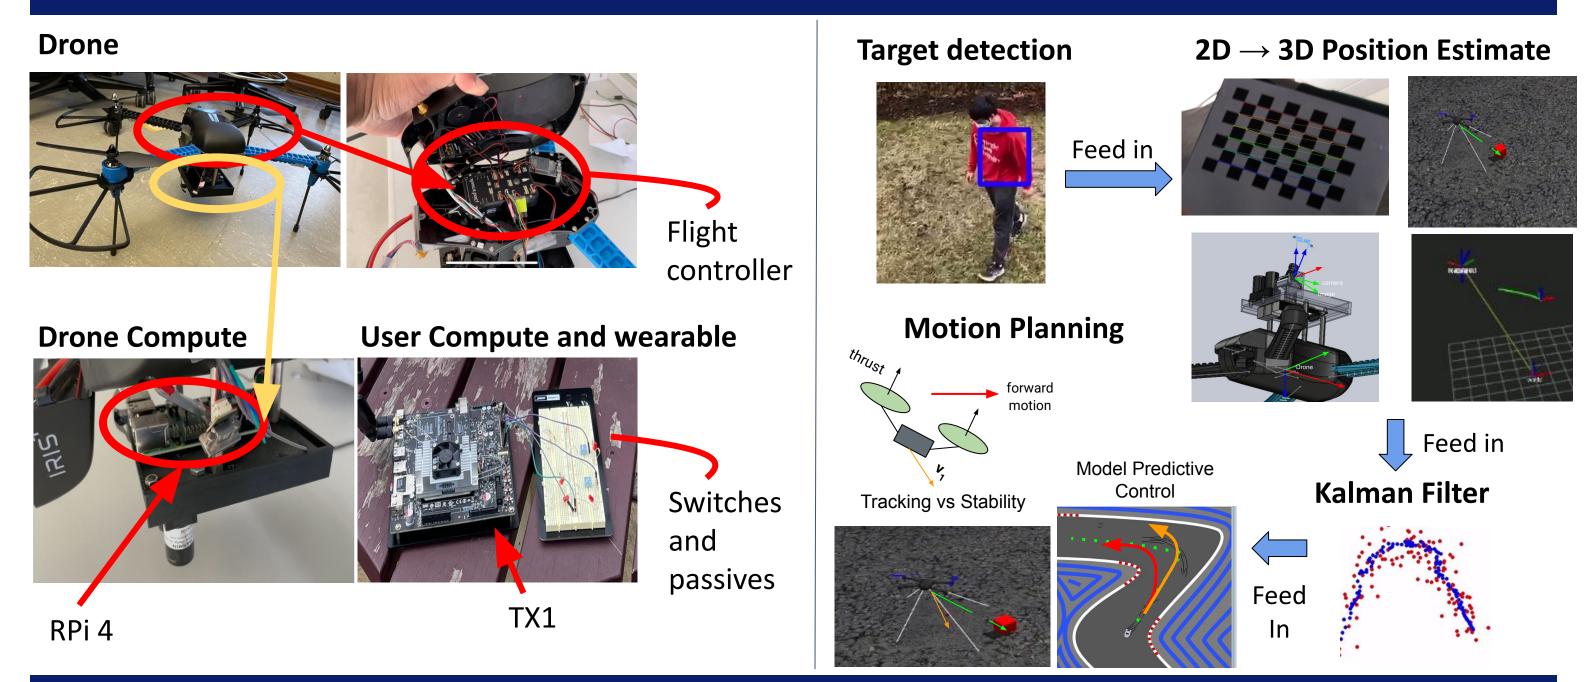

System Evaluation

Target Detection

FN: False Positive Rate **FP: False Positive**

	FP Rate	FN Rate	Avg. Pixel Error	
Actual	0%	14.78%	11.87	
Desired	2%	10%	(N/A)	




Test Size: 157 frames

Motion Planning (simulation)

Drone Tracking: % of frames where the target is within frame **Drone Stability:** % of 3 second windows where drone position is stable*

Test	Tracking	Stability	
Walking	100%	100%	
Running	88%	100%	
Both	97%	93.75%	
Desired	90%	90%	

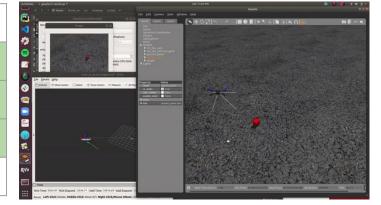

Computation Frequency					
Operation	Average Time Taken (s)	FPS			
Capture Image	0.344	2.91			
Stream Image to TX1	0.25	4			
Convert Image to Cv2	7.14e-5	14006			
Detect Target	2.67e-4	3745			
Target State Estimation	6.50e-4	1538			
Motion Planning	0.0135	74.07			
Overall	0.344	2.91			
Desired		5 - 10			

*Stability measured by taking standard deviation of target (x, y) across 30 second windows and measuring the % of frames where std(x) <= width/6 and std(y) <= height/6)

Electrical & Computer ENGINEERING

Trade-Offs

Motion Planning Costs

Cost = Tracking cost + Control Cost

	Current Design	Higher Control Cost	Lower Control Cost
Tracking	97%	47%	84.58%
Stability	93.75%	100%	43.75%

Image Compression

There IS a difference in streaming (4 FPS vs. 6.67 FPS), but that's irrelevant since it isn't bottleneck

> Uncompressed: 2.91 FPS Compressed: 2.94 FPS